


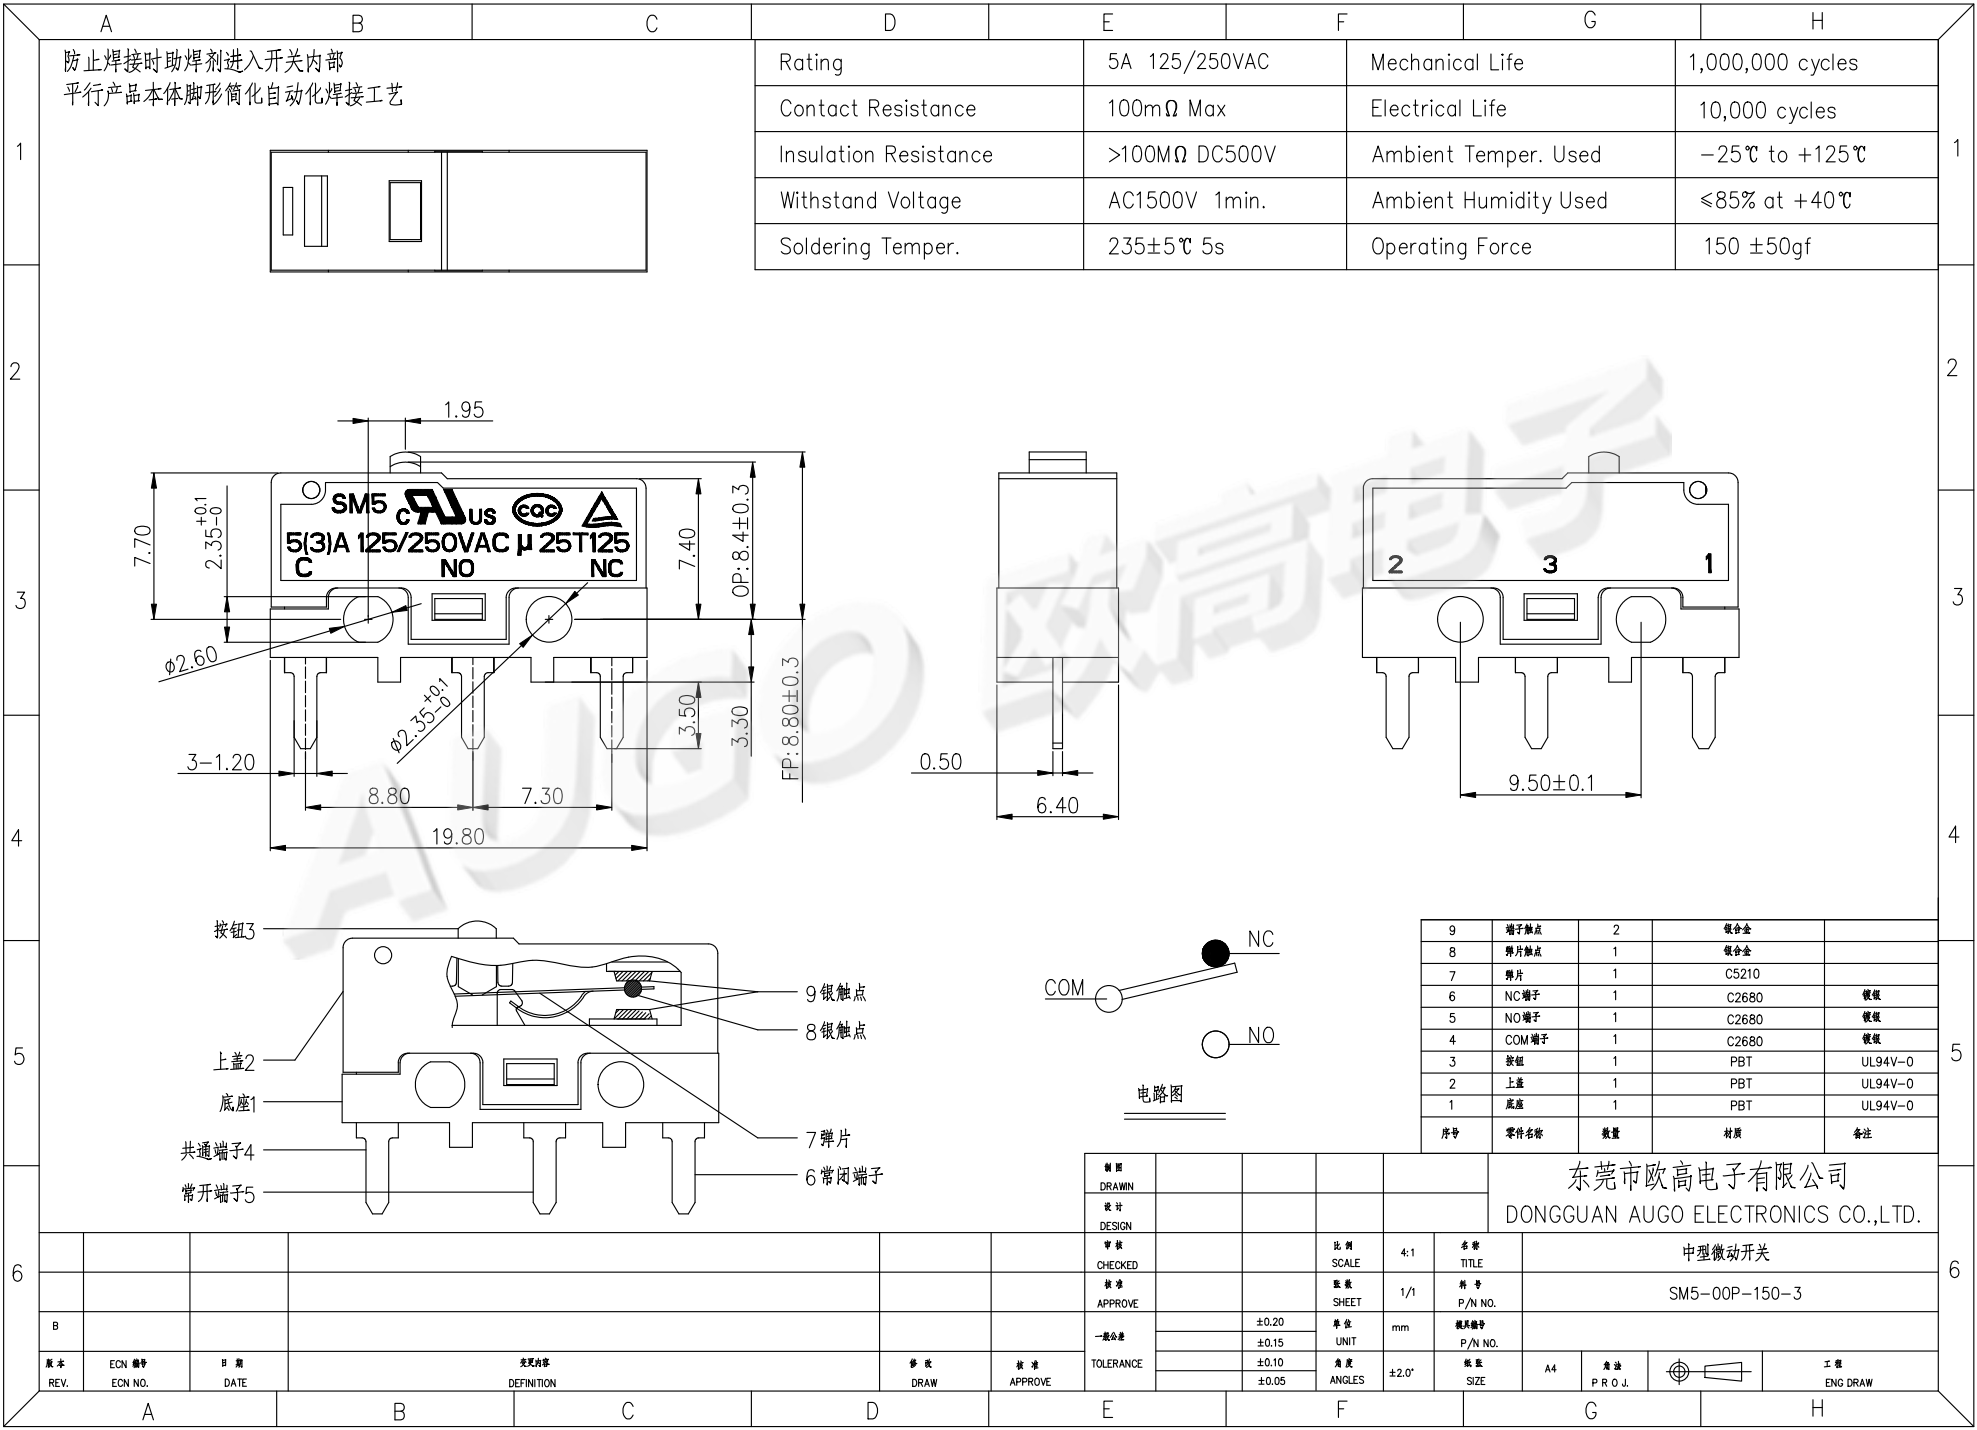

防止焊接时助焊剂进入开关内部
平行产品本体脚形简化自动化焊接工艺

Rating	5A 125/250VAC	Mechanical Life	1,000,000 cycles
Contact Resistance	100m Ω Max	Electrical Life	10,000 cycles
Insulation Resistance	>100M Ω DC500V	Ambient Temper. Used	-25 $^{\circ}$ C to +125 $^{\circ}$ C
Withstand Voltage	AC1500V 1min.	Ambient Humidity Used	$\leq$ 85% at +40 $^{\circ}$ C
Soldering Temper.	235 $\pm$ 5 $^{\circ}$ C 5s	Operating Force	150 $\pm$ 50gf

9	端子触点	2	银合金	
8	弹片触点	1	银合金	
7	弹片	1	C5210	
6	NC端子	1	C2680	镀银
5	NO端子	1	C2680	镀银
4	COM端子	1	C2680	镀银
3	按钮	1	PBT	UL94V-0
2	上盖	1	PBT	UL94V-0
1	底座	1	PBT	UL94V-0
序号	零件名称	数量	材料	备注

制图 DRAWN					东莞市欧高电子有限公司 DONGGUAN AUGO ELECTRONICS CO.,LTD.				
设计 DESIGN					中型微动开关				
审核 CHECKED			比例 SCALE	4:1	名称 TITLE	SM5-00P-150-3			
核准 APPROVE			张数 SHEET	1/1	料号 P/N NO.				
公差 TOLERANCE			单位 UNIT	mm	版本 P/N NO.				
			角度 ANGLES	$\pm 2.0^{\circ}$	板厚 SIZE	A4	油漆 P R O J.		工程 ENG DRAW