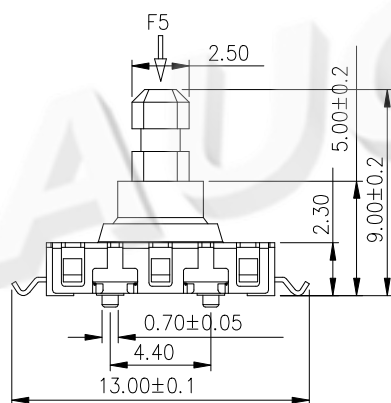
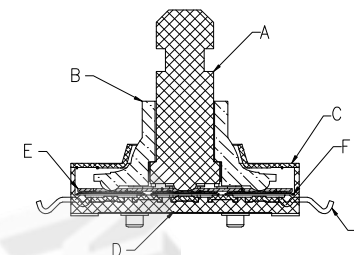
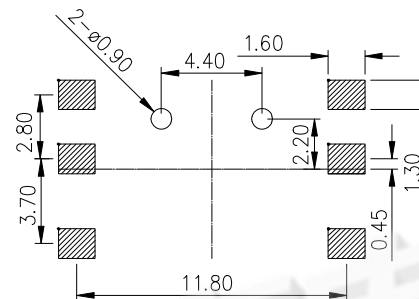
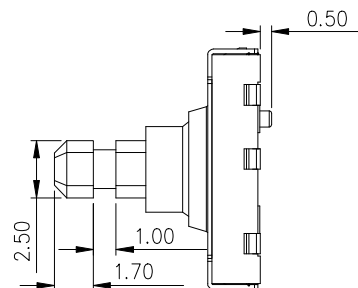
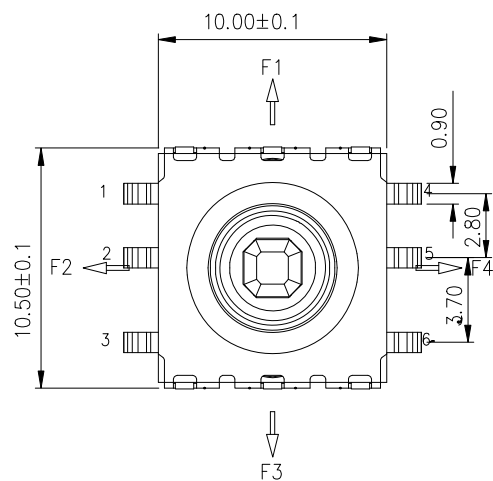


■ 电路图

	1	2	3	4	5	6
F1	○			○		
F2	○	○				
F3	○					○
F4	○			○		
F5	○	○				

材料:

- A 按钮: PA46 (黑色)
B 梅花护套: LCP (灰黑色)
C 盖板: SUS (清洗与白色)
D 底座: PA46 (黑色)
E 接触垫片: 复银铜 (银白色镀银)
F 弹片: 复银不锈钢 (银白色镀银)
G 嵌件: 磷铜 (镀银与银白色)

主要技术规格:

1. 额定值: 0.1A MAX
2. 接触电阻: $\leq 80\text{m}\Omega$
3. 操作力: $200\text{gf} \pm 50\text{gf}$
4. 行程: $0.20 \pm 0.05\text{mm}$
5. 绝缘电阻: $\geq 100\text{M}\Omega/\text{min (DC100V)}$
6. 耐压强度: AC250V 50HZ/1Min.
7. 寿命: 5×10^5 Cycles Min
8. 额定电压: DC 12V

DONGGUAN AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		SWITCH			DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.		MT-1504SA-06			CHECK	G.C.Chen	REV.	A1
	UNIT : mm	TOLERANCE OTHERWISE	UP TO 5	± 0.2	ANGLE	APPROVAL	DATE	14-03-2013
			ABOVE 5 30 ~	± 0.3				
	mm	OTHERWISE	ABOVE 30	± 0.5	ANGLE	SCALE	PAGE	1 OF 1
			ANGLE	$\pm 3^\circ$				