


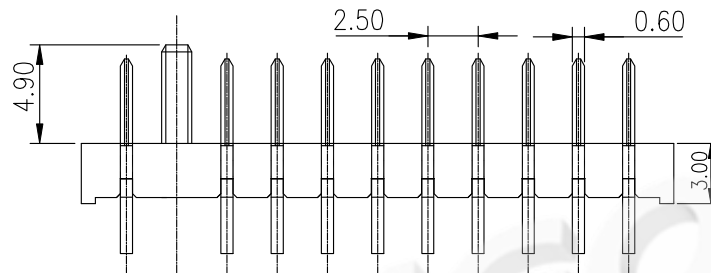


Rohs

REV.	DESCRIPTION	DRAW.	DATE.

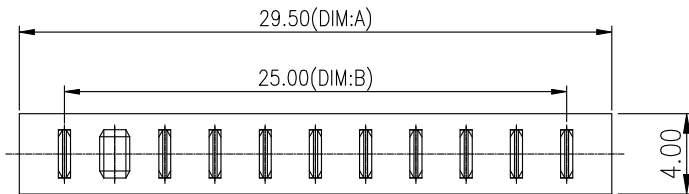

No. of Pins	Dimension	
	DIM.B	DIM.A
03	7.50	12.00
04	10.00	14.50
05	12.50	17.00
06	15.00	19.50
07	17.50	22.00
08	20.00	24.50
09	22.50	27.00
10	25.00	29.50

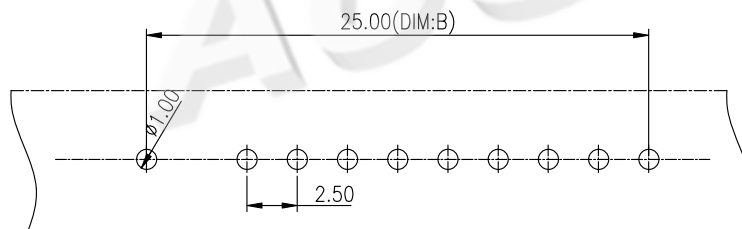

Recommended P.C.B Layout
Layout Tolerance=+/-0.05mm

Material:
Insulator : NYLON 9T (UL94V-0)
Contact : Phosphor Bronze
Contact Plated : Gold over Nickel or Tin
Specification:
Current Rating : 7A
Instant Current : 10A
Voltage Rating : 30V
Contact Resistance : 30m Ω
Insulation Resistance : 100M Ω
Dielectric Voltage : 500V
Operating Temperature : -40°~105°

AUGO

AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

REV:

01

SIZE:

A4

SCALE: 1:1

UNIT: mm

SHEET: 1/1



UNLESS OTHERWISE
SPECIFIED,TOLERANCE:

X. ±0.20

X.x ±0.15

X.xx ±0.10

ANGULAR ±2°

TITLE:

BATTERY FEMALE 2.5PITCH
BOARD TO BOARD CONNECTOR

PART NO:

AUGO-B02M-R1-A

DESIGN

G.C.CHEN

DATE

DRAWING

Y.C.ZHANG

DATE

CHECK

D.J.WANG

DATE

SCALE

1:1

PAGE

1 OF 1