


Rohs

REV.	DESCRIPTION	DRAW.	DATE.

No. of Pins	Dimension		
	DIM.B	DIM.A	DIM.C
03	5.00	9.50	4.20/5.80
04	7.50	12.00	4.20/5.80
05	10.00	14.50	4.20/5.80
06	12.50	17.00	4.20/5.80
07	15.00	19.50	4.20/5.80
08	17.50	22.00	4.20/5.80
09	20.00	24.50	4.20/5.80
10	22.50	27.00	4.20/5.80
11	25.00	29.50	4.20/5.80

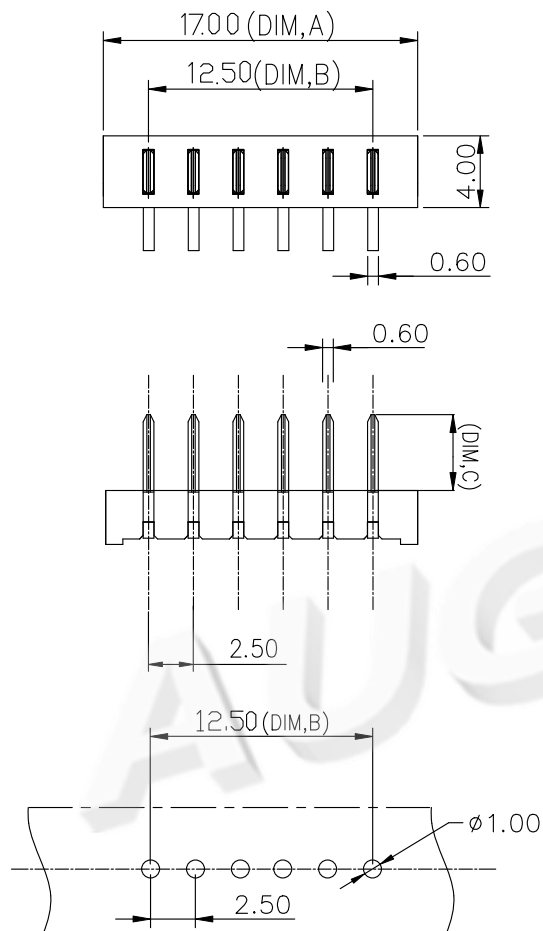

RECOMMENDED PCB LAYOUT
T=1.2MM,TOLERANCES±0.05MM

Material:
Insulator : NYLON 9T (UL94V-0)
Contact : Phosphor Bronze
Contact Plated : Gold over Nickel or Tin
Specification:
Current Rating : 5A
Instant Current : 7A
Voltage Rating : 30V
Contact Resistance : 30m Ω
Insulation Resistance : 100M Ω
Dielectric Voltage : 500V
Operating Temperature : -25°~85°

AUGO

AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

REV:

01

SIZE:

A4

SCALE:1:1

UNIT:mm

SHEET:1/1



UNLESS OTHERWISE
SPECIFIED,TOLERANCE:

X. ±0.20

X.x ±0.15

X.xx ±0.10

ANGULAR ±2°

TITLE:

BATTERY FEMALE
2.5PITCH BOARD TO
BOARD CONNECTOR

PART NO:

AUGO-B05M-B

DESIGN

G.C.CHEN

DATE

DRAWING

Y.C.ZHANG

DATE

CHECK

D.J.WANG

DATE

SCALE

1:1

PAGE

1 OF 1