
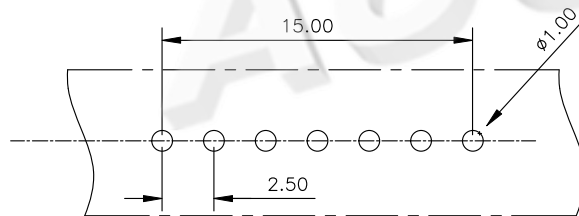

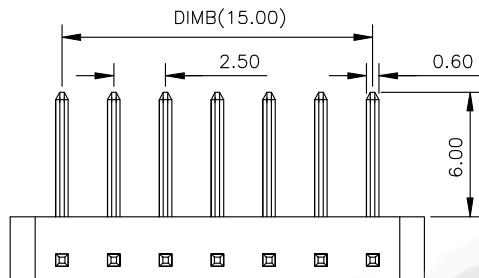


Rohs

REV.	DESCRIPTION	DRAW.	DATE.

Pin	Dimension	
	DIM.B	DIM.A
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50

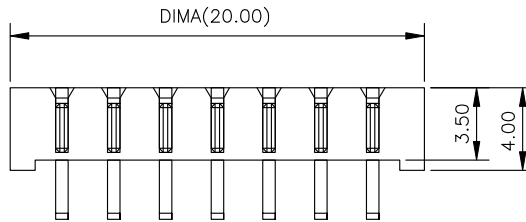

RECOMMENDED PCB LAYOUT
T=1.2MM,TOLERANCES±0.05MM

Material:
Insulator : LCP (UL94V-0)
Contact : Phosphor Bronze
Contact Plated : Gold over Nickel or Tin
Specification:
Current Rating : 5A
Instant Current : 7A
Voltage Rating : 30V
Contact Resistance : 30m Ω
Insulation Resistance : 100M Ω
Dielectric Voltage : 500V
Operating Temperature : -25°~85°

AUGO

AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

REV:	01	UNLESS OTHERWISE SPECIFIED,TOLERANCE:		TITLE:	BATTERY FEMALE 2.5 PITCH BOARD TO BOARD CONNECTOR	DESIGN	G.C.CHEN	DATE	
SIZE:	A4					DRAWING	Y.C.ZHANG	DATE	
SCALE:1:1	UNIT:mm	X. ±0.20 X.x ±0.15 X.xx ±0.10 ANGULAR ±2°	⊕	PART NO:	AUGO-B07M-B	CHECK	D.J.WANG	DATE	
SHEET:1/1	⊕					SCALE	1:1	PAGE	1 OF 1