

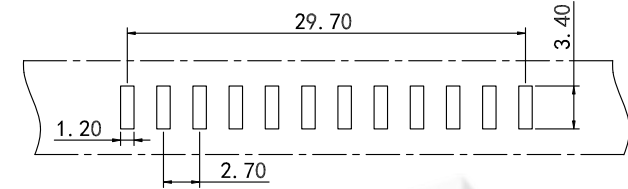
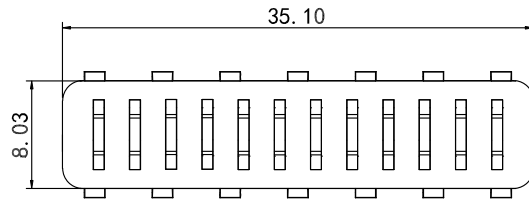


Rohs


REV.	DESCRIPTION	DRAW.	DATE.



RECOMMENDED PCB LAYOUT
T=0.65MM, TOLERANCES ±0.05MM

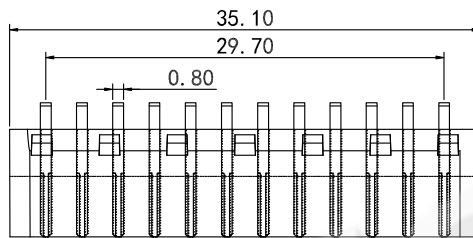

Material:
Insulator : LCP (UL94V-0)
Contact : Phosphor Bronze
Contact Plated : Gold over Nickel or Tin
Specification:
Current Rating : 12A
Instant Current : 15A
Voltage Rating : 12V
Contact Resistance : 30m Ω
Insulation Resistance : 100M Ω
Dielectric Voltage : 500V
Operating Temperature : -25°~85°

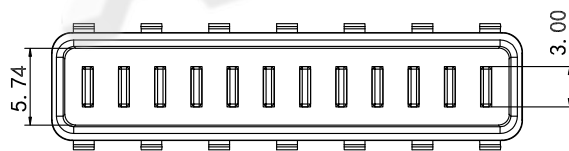

2	HOUSING	LCP	1	GRAY
1	CONTACT TERMINAL	C2680	12	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

AUGO

AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

REV:	01
SIZE:	A4
SCALE: 1:1	UNIT: mm
SHEET: 1/1	

UNLESS OTHERWISE SPECIFIED,TOLERANCE:	
X.	±0.20
X.x	±0.15
X.xx	±0.10
ANGULAR	±2°

TITLE:	BATTERY MALE 2.7 PITCH BOARD TO BOARD CONNECTOR
PART NO:	AUGO-B27M-12P

DESIGN	G.C.CHEN	DATE	
DRAWING	Y.C.ZHANG	DATE	
CHECK	D.J.WANG	DATE	
SCALE	1:1	PAGE	1 OF 1