

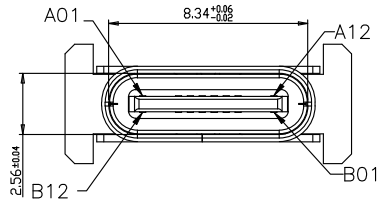
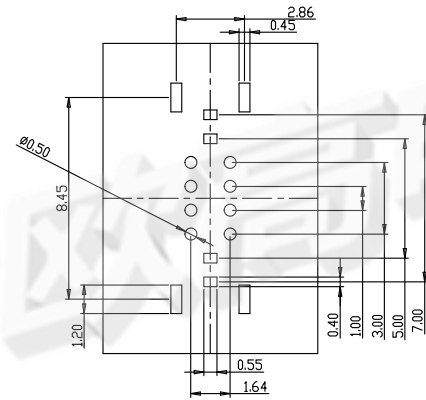


Rohs




REV.	DESCRIPTION	DRAW.	DATE.

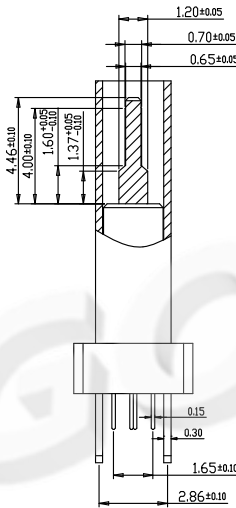

SPECIFICATIONS:
 1. ELECTRICAL CHARACTERISTICS:
 1-1. CONTACT RESISTANCE: 30mΩ MAX.
 1-2. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE.
 1-3. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC
 2. MECHANICAL CHARACTERISTICS:
 2-1. INSERTION FORCE: 0.5-2.0Kgf(REF.)
 2-2. WITHDRAWAL FORCE: 0.8-2.0Kgf(REF.)
 3. LIFE TEST: 5,000 CYCLES.
 4. TO CONFIRM TO THE KRCDNN HAZARDOUS SUBSTANCE FREE SPEC.

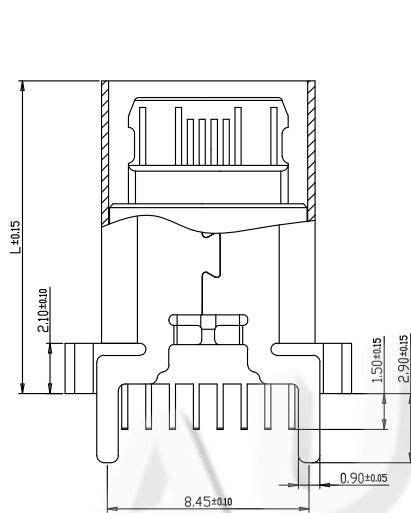

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
 TOLERANCE UNSPECIFIED ±0.05mm

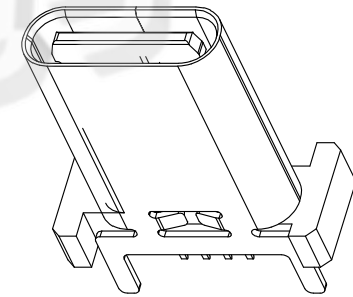

PIN	SIGNAL NAME	PIN	SIGNAL NAME	L = MM							
A1	GND	B12	GND	9.30	10.00	10.50	12.40	13.10	13.70	15.00	17.50
A4	VBUS	B9	VBUS								
A5	CC1	B8	SBU2								
A6	DP1	B7	DN2								
A7	DN1	B6	DP2								
A8	SBU1	B5	CC2								
A9	VBUS	B4	VBUS								
A12	GND	B1	GND								

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
6	SHELL	STAINLESS STEEL	Ni Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	NO	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS

AUGO

AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

REV:	01
SIZE:	A4
SCALE: 1:1	UNIT: mm
SHEET: 1/1	

UNLESS OTHERWISE SPECIFIED, TOLERANCE:	
X.	±0.20
X.x	±0.15
X.xx	±0.10
ANGULAR	±2°

TITLE:	TYPE-C SERIES
PART NO:	TYPE-C 12PIN 立式全插

DESIGN	H.Y.ZHU	DATE	
DRAWING	W.B.QIAO	DATE	
CHECK	G.C.CHEN	DATE	
SCALE	1:1	PAGE	1 OF 1