
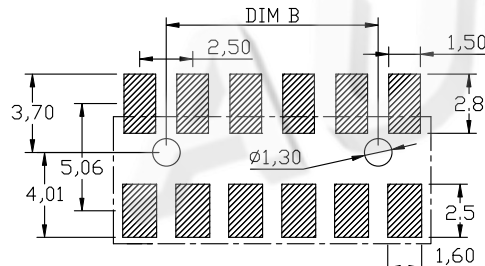
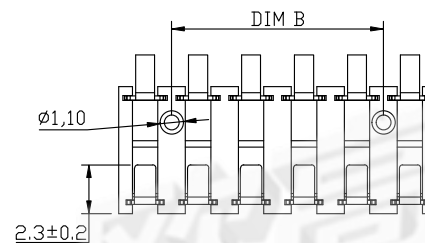

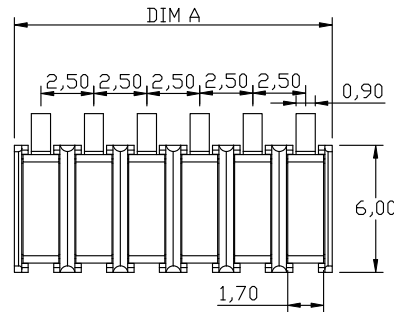



Rohs

REV.	DESCRIPTION	DRAW.	DATE.

PART NO.	DIM A	DIM B
AUGO-BF-25-2PD160	5.0	
AUGO-BF-25-3PD160	7.5	2.5
AUGO-BF-25-4PD160	10.0	5.0
AUGO-BF-25-5PD160	12.5	7.5
AUGO-BF-25-6PD160	15.0	10.0



RECOMMENDED PCB LAYOUT
TOP VIEW (.XX±0.05)

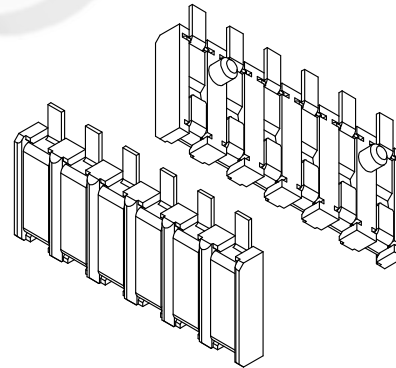

Material:
Insulator : LCP (UL94V-0)
Contact : Phosphor Bronze
Contact Plated : Gold over Nickel or Tin
Specification:
Current Rating : 3A
Voltage Rating : 50V
Contact Resistance : 30m Ω
Insulation Resistance : 500M Ω
Dielectric Voltage : 500V
Operating Temperature : -40°~125°
Electrical Life : 10000cycles

AUGO

AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

REV:	01	UNLESS OTHERWISE SPECIFIED,TOLERANCE:		TITLE:	2.5 PITCH BATTERY CONNECTOR	DESIGN	G.C.CHEN	DATE	
SIZE:	A4					DRAWING	Y.C.ZHANG	DATE	
SCALE:1:1	UNIT:mm	X.	±0.20	PART NO:	AUGO-BF-25H160	CHECK	D.J.WANG	DATE	
SHEET:1/1		X.x	±0.15			SCALE	1:1	PAGE	1 OF 1
		X.xx	±0.10						
		ANGULAR	±2°						