
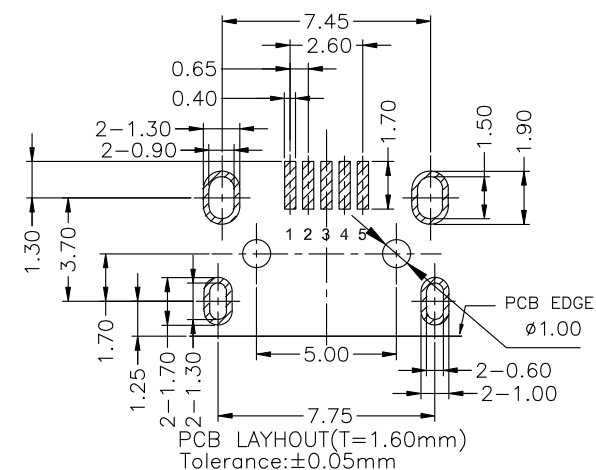
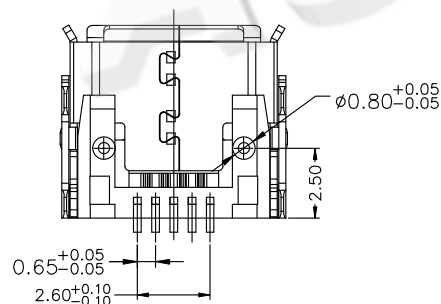
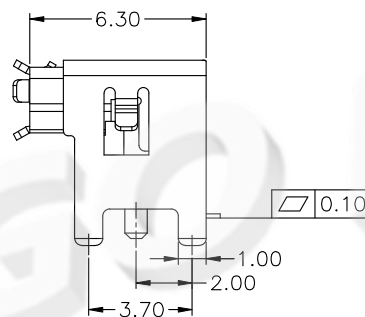
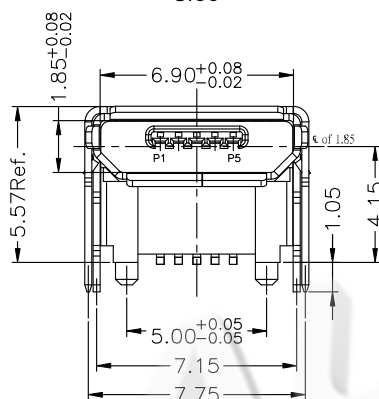



Rohs

REV.	DESCRIPTION	DRAW.	DATE.

说明:

1. 胶芯: LCP 黑色; UL94V-0.
2. 端子: C2680 T=0.15mm, 半金镍1u" (镀层)
3. 外壳: SUS304 T=0.25mm, 镀锡
4. 护套: SUS304 T=0.25mm, 镀锡
5. 额定电流: 1 A 最大.
6. 耐电压: 100V(AC) /1分钟 至少.
7. 接触阻抗: 50m  $\Omega$  最大.
8. 绝缘阻抗: 100M  $\Omega$  最小.
9. 插入力: 3.57 Kgf 最大.
10. 拔出力: 1.0 Kgf 初始 最小; 测试后 0.81 Kgf 最小
11. 温度范围: -30°C~+80°C

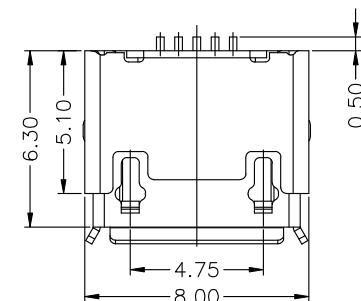

AUGO

AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

REV:

01

UNLESS OTHERWISE  
SPECIFIED,TOLERANCE:

SIZE:

A4

SCALE:1:1

UNIT:mm

SHEET:1/1

ANGULAR

TITLE:

Micro USB SERIES

PART NO:

MICRO 5P BH4.15 WSL1.0

DESIGN

H.Y.ZHU

DATE

DRAWING

W.B.QIAO

DATE

CHECK

G.C.CHEN

DATE

SCALE

1:1

PAGE

1 OF 1